


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 1 TOWNSHIP 14 RANGE 2  
DATE: -10-02-02 1-10-07  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 7-16-97

IN. S.P.C. E ZONE NAD '83  
NAME: 14020102  
N: 493437.1680(m)  
E: 49112.8630(m)

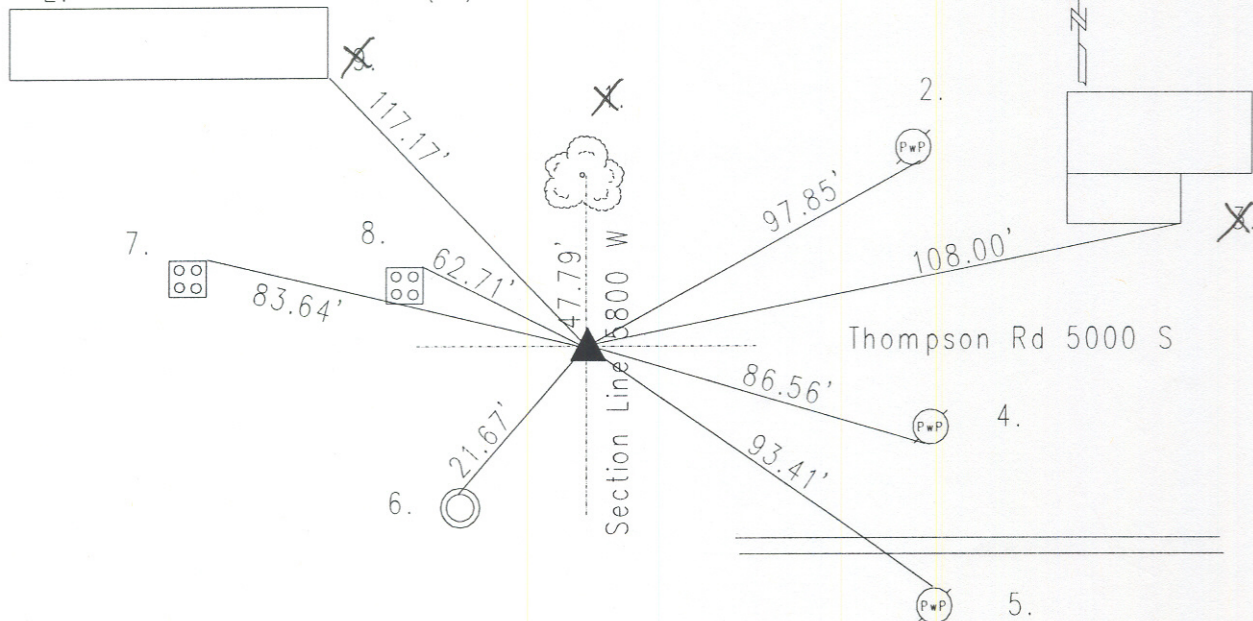

Original post set 1820 by Laughlin with witness: 10" beech N 12 W 10 links; 60" poplar S 29 W 9 links per Marion County Atlas pg. 1. McCoyner 4-5-1898 called stone with no witness per Decatur Township Legal Survey Book pg. 38. GWS 6-28-62 called an axle 8" down. SeFranka 4-11-74 called same only 15" down. Hylden 10-28-74 called same. Wilcoxon 8-14-97 called same. Wilcoxon 7-1-85 called PK nail over axle. Kiste 9-19-94 called same. Excavated by Kiste 7-16-97 and PK nail found 3" down. An axle found 20" down under PK nail. Harrison set on top of the axle in position of corner. Re-tied 10-02-02 by Wilcoxon. 14020102

REF.	DISTANCE	DESCRIPTION
1.	<del>47.79'</del>	<del>Due N to PK nail in washer E 36" maple 18"up</del>
2.	97.85'	Mag nail SE PwP#3496-685A 12"up
3.	<del>108.00'</del>	<del>SE corner of brick garage for ADDRESS 5650</del>
4.	86.56'	Road nail S PwP#346-685 A 6"up
5.	93.41'	Mag nail NE PwP#476-685 A 14"up
6.	21.67'	Cut 'x' N-side of concrete rim for storm manhole
7.	83.64'	NE corner of stone light base 6"up
8.	62.71'	NE corner stone light base 6"up
9.	<del>117.17'</del>	<del>SE corner of address 5710 6"up</del>